

AETES

INTELLIGENT PDU SERIES

*Remote Power Management
Individual Outlet Power Control
Temperature and Humidity Monitoring*

IP2202



"...power alliance..."

BACK PANEL




DESCRIPTION

AETES Intelligent PDU allows an administrator to access from a remote terminal and interface with it to turn on or off outlets and it can monitor every outlets power consumption through web and local ampmeter, and optional accessory can support humidity and temperature detection.

FEATURES

- Integrated web server manages can real time to monitoring the power consumption of PDU.
- Build-in true RMS 3 digits current meter.
- Easy set up, meter display the IP directly.
- Secure access with SSL encryption
- Provide per outlet power consumption.
- Send the email and traps when the power consumption exceed the trigger value of warning or overload to the PDU.
- Provide utility, it can monitor a large mount of PDU at the same time.
- Support the SNMP and provide MIB for the PDU to be monitored by NMS.
- Real time to control outlets of PDU.
- Indicate circuits status with LED.
- Optional accessory can support temperature and humidity detection.

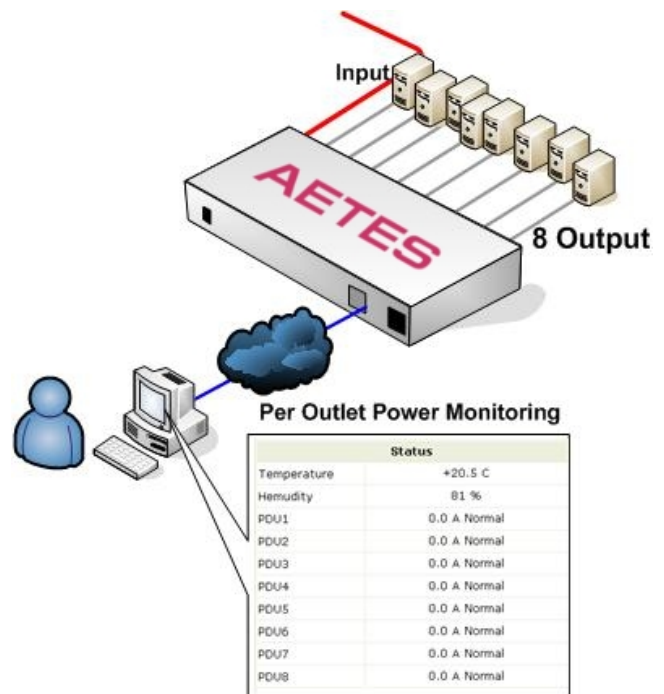

IP2202 SPECIFICATION

| | |
|------------------------|--|
| Nominal Voltage | 230 VAC |
| Voltage | 200 VAC~ 240 VAC full range |
| Max. Current | 16 A |
| Frequency | 50/60 HZ full range |
| Output | (8) IEC320 C13 |
| Input | (1) IEC320 C20 Inlet |
| Protection | (1) 16A Circuit Breaker |
| SSL Indication | (1) Yellow LED |
| DHCP Indication | (1) Green LED |
| Power Status | (8) Red LED |
| Interface | (1) RJ45 for Ethernet |
| Software | AETES PDU Management Software Included |
| Environmental | (1) RJ11 for Temperature / Humidity Probe |
| Outlet Controls | Individual, Group, Schedule, Auto Ping |
| Power Monitor | Per Outlet Power Consumption |
| Ampmeter | 3 Digits Seven Segments for True RMS Meter Range: 0 A ~ 20 A Resolution: 0.1A Precision: +/-2%+/-0.1 A |
| Temperature | 0 ~ 40 C |
| Humidity | 0% ~ 90% |
| Size | 1U x 19" x 160 mm |
| Weight | 3 kg |

MODELS

| | | | | | | |
|---------------|----------|----|------|-----|------------------|---------------------|
| IP1240 | Rack PDU | 1U | 115V | 20A | NEMA 5-20P Plug | 8 x 5-15/20R Outlet |
| IP2202 | Rack PDU | 1U | 230V | 16A | IEC-320 C20 Plug | 8 x C13 Outlet |
| IP2402 | Rack PDU | 1U | 230V | 32A | IEC-309 32A Plug | 8 x C13 Outlet |

COMPATIBILITY

UL 60950-1
CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
C-Tick AS/NZS CISPR 22: 2006